


# Safety directional valves with spool position monitoring

On-off, direct operated

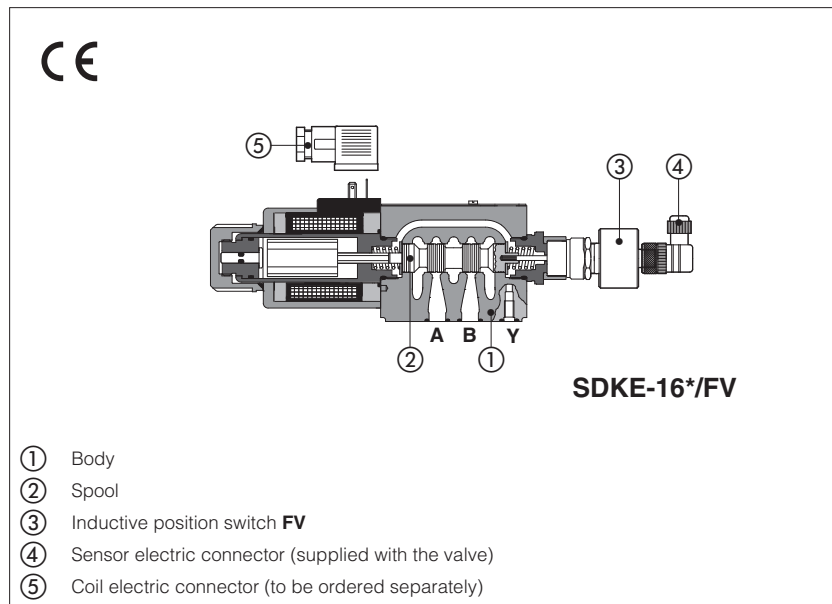

Direct operated safety directional valves with spool position monitoring.

**SDHE**, size 06, high performances, for AC and DC supply with cURus certified solenoids

**SDKE**, size 10, for AC and DC supply with cURus certified solenoids

The valves are equipped with **FV** inductive position switch for the spool position monitoring, see section [1](#) and [11](#) for sensors availability and technical characteristics.

Mounting surface: **ISO 4401**, size **06** and **10**

Max flow: **SDHE 80 l/min**  
**SDKE 150 l/min**

Max pressure: **350 bar**

## 1 RANGE OF VALVE'S MODELS

Valve code	Size	Description	DC solenoids	AC solenoids
			Sensor type	
			/FV	/FV
<b>SDHE-06</b>	06	direct operated solenoid valves, on-off, single solenoid	•	•
<b>SDHE-07</b>	06	direct operated solenoid valves, on-off, double solenoid	•	
<b>SDKE-16</b>	10	direct operated solenoid valves, on-off, single solenoid	•	•
<b>SDKE-17</b>	10	direct operated solenoid valves, on-off, double solenoid	•	


### Notes:

**FV** = inductive position switch providing both NO and NC contacts to be wired on the electric connector


See section [11](#) for sensor's characteristics

### 1.1 FV switch configurations


Single solenoid valves size 06 & 10 are provided with n° 1 FV switch for the spool position monitoring




Double solenoid valves size 06 & 10 are provided with n° 1 FV switch for the spool position monitoring



Double solenoid valves size 06 with detent are provided with n° 1 FV switch for the spool position monitoring



Double solenoid valves size 10 with detent are provided with n° 1 FV switch for the spool position monitoring



For model code of **SDHE** safety valves, see section [2](#)

For model code of **SDKE** safety valves, see section [4](#)

**2 MODEL CODE OF SDHE/FV**

<b>SDHE</b>	-	<b>0</b>	<b>63</b>	<b>1/2</b>	/	<b>A</b>	/	<b>FV</b>	-	<b>X</b>	<b>24DC</b>	<b>**</b>	/	<b>*</b>
Directional control valve size 06 <b>SDHE</b> = max flow 80 l/min												Seals material see sect. 6, 7 - = NBR <b>PE</b> = FKM		
<b>Size ISO 4401</b> <b>0</b> = size 06												Series number		
<b>Valve configuration</b> , see section 3 <b>61</b> = single solenoid, central plus external position, spring centered <b>63</b> = single solenoid, 2 external positions, spring offset <b>67</b> = single solenoid, external plus central position, spring offset Only for DC solenoid: <b>71</b> = double solenoid, 3 positions, spring centered <b>75</b> = double solenoid, 2 external positions, with detent												<b>Voltage code</b> , see section 9		
<b>Spool type</b> , see section 3												<b>X</b> = without connector, see section 10 for available connectors, to be ordered separately		
<b>Options</b> , see section 8												<b>Spool position monitor:</b> <b>FV</b> = inductive position switch (double contact)		

(1) the **FV** inductive position switch provides both NC and NO contacts

**3 CONFIGURATIONS AND SPOOLS** (representation according to ISO 1219-1)

Configurations	Spools	Configurations	Spools

(1) only for configuration 61, not available for configuration 61/A

**3.1 Special shaped spools for SDHE**

- spools type **0** and **3** are also available as **0/1** and **3/1** with restricted oil passages in central position, from user ports to tank.
- spools type **1**, **4**, **5** and **58** are also available as **1/1**, **4/8**, **5/1** and **58/1**.  
They are properly shaped to reduce water-hammer shocks during the swithing.
- spools type **1**, **1/2**, **3**, **8** are available as **1P**, **1/2P**, **3P**, **8P** to limit valve internal leakages.
- Other types of spools can be supplied on request.

**4 MODEL CODE OF SDKE/FV**

<b>SDKE</b>	- <b>1</b>	<b>63</b>	<b>1/2</b> /	<b>A</b> /	<b>FV</b> -	<b>X</b>	<b>24DC</b>	<b>**</b> /	<b>*</b>	
Directional control valve size 10  <b>Size</b> ISO 4401 1 = size 10  <b>Valve configuration</b> , see section 5 <b>61</b> =single solenoid, central plus external position, spring centered <b>63</b> =single solenoid, 2 external positions, spring offset <b>67</b> =single solenoid, external plus central position, spring offset Only for DC solenoid: <b>71</b> =double solenoid, 3 positions, spring centered <b>75</b> =double solenoid, 2 external positions, with detent  <b>Spool type</b> , see section 5  <b>Options</b> , see section 8							Seals material see sect. 6,7 - = NBR <b>PE</b> = FKM  Series number			
							<b>Voltage code</b> , see section 9  <b>X</b> = without connector, see section 10 for available connectors, to be ordered separately			
							<b>Spool position monitor:</b> <b>FV</b> = inductive position switch (double contact)			

**SDKE/FV are always provided with Y drain port**  
**(1)** the **FV** inductive position switch provides both NC and NO contacts

**5 CONFIGURATIONS AND SPOOLS** (representation according to ISO 1219-1)

Configurations	Spoos	Configurations	Spoos
<p>(1) only for SDKE-1611/3/*DC                  (2) only for configuration 63, not available for configuration 63/A</p>			

**5.1 Special shaped spools for SDKE**

- spools type **0** and **3** are also available as **0/1** and **3/1** with restricted oil passages in central position, from user ports to tank.
- spools type **1** is also available as **1/1**, properly shaped to reduce the water-hammer shocks during the switching.
- spool type **1/9** has closed center in rest position but it avoids the pressurization of A and B ports due to the internal leakages.
- other types of spools can be supplied on request.

## 6 MAIN CHARACTERISTICS

Assembly position / location	Any position		
Subplate surface finishing	Roughness index Ra 0,4 - flatness ratio 0,01/100 (ISO 1101)		
MTTFd values according to EN ISO 13849	150 years, for further details see technical table P007		
Compliance	CE to Low Voltage Directive 2014/35/EU RoHS Directive 2011/65/EU as last update by 2015/65/EU REACH Regulation (EC) n°1907/2006		
Ambient temperature	<b>Standard</b> = -30°C ÷ +70°C <b>/PE option</b> = -20°C ÷ +70°C		
Flow direction	As shown in the symbols of table 3 and 5		
<b>Operating pressure</b>	<b>SDHE</b>	P, A, B = <b>350 bar</b> T = <b>210 bar</b> (DC solenoid); <b>160 bar</b> (AC solenoid)	
	<b>SDKE</b>	P, A, B = <b>350 bar</b> T = (with Y port not connected to tank) <b>210 bar</b> (DC solenoid); <b>120 bar</b> (AC solenoid) T = (with Y port drained to tank) <b>250 bar</b>	
<b>Rated flow</b>	see diagrams Q/Δp at section 14		
<b>Maximum flow</b>	<b>SDHE</b>	<b>80 l/min</b> see section 15	
	<b>SDKE</b>	<b>150 l/min</b> see section 15	

### 6.1 Coils characteristics

Insulation class	<b>H</b> (180°C) for DC coils (all versions) <b>F</b> (155°C) for AC coils (SDHE, SDKE) Due to the occurring surface temperatures of the solenoid coils, the European standards EN ISO 13732-1 and EN ISO 4413 must be taken into account
Protection degree to DIN EN 60529	<b>IP 65</b> (with connectors correctly assembled)
Relative duty factor	100%
Supply voltage and frequency	See electric features 9
Supply voltage tolerance	± 10%
Certification	<b>cURus</b> North American standard

## 7 SEALS AND HYDRAULIC FLUID - for other fluids not included in below table, consult our technical office

Seals, recommended fluid temperature	NBR seals (standard) = -20°C ÷ +80°C, with HFC hydraulic fluids = -20°C ÷ +50°C FKM seals (/PE option) = -20°C ÷ +80°C		
Recommended viscosity	15 ÷ 100 mm <sup>2</sup> /s - max allowed range 2,8 ÷ 500 mm <sup>2</sup> /s		
Max fluid contamination level	ISO4406 class 20/18/15 NAS1638 class 9, see also filter section at www.atos.com or KTF catalog		
<b>Hydraulic fluid</b>	<b>Suitable seals type</b>	<b>Classification</b>	<b>Ref. Standard</b>
Mineral oils	NBR, FKM	HL, HLP, HLPD, HVLP, HVLPD	DIN 51524
Flame resistant without water	FKM	HFDU, HFDR	ISO 12922
Flame resistant with water	NBR	HFC	

## 8 OPTIONS

**A** = Single solenoid valves: solenoid mounted at side of port B. In standard versions the solenoid is mounted at side of port A.

Double solenoid valves SDHE/FV(DC), SDKE/FV(DC): FV inductive position switch mounted at side of port A. In standard versions the position switch is mounted at side of port B.

**WARNING:** the manual operation is not permitted for safety valves, than the valve is provided with solenoid blind rings to prevent the access to the manual override. The manual override protected by rubber cup (option /WP) is not available



**WARNING:** the inobservance of following prescriptions invalidates the certification and may represent a risk for personnel injury

Safety valves must be installed and commissioned only by qualified personnel

Safety valves must not be disassembled

The inductive position switch FV can be adjusted only by the valve's manufacturer or Atos authorized service centers

Valve's components cannot be interchanged

The valves must operate without switching shocks and spool vibrations



**9 ELECTRIC FEATURES**

**9.1 COILS FOR SDHE/FV**

External supply nominal voltage ± 10%	Voltage code	Type of connector	Power consumption (2)	Code of spare coil
12 DC	<b>12 DC</b>	666 or 667	30 W	COE-12DC
14 DC	<b>14 DC</b>			COE-14DC
24 DC	<b>24 DC</b>			COE-24DC
28 DC	<b>28 DC</b>			COE-28DC
110 DC	<b>110 DC</b>			COE-110DC
220 DC	<b>220 DC</b>			COE-220DC
110/50 AC	<b>110/50/60 AC</b>	669	58 VA (3)	COE-110/50/60AC
230/50 AC	<b>230/50/60 AC</b>			COE-230/50/60AC
110/50 AC	<b>110RC</b>	669	30 W	COE-110RC
120/60 AC				<b>230RC</b>
230/50 AC				
230/60 AC				

(1) In case of 60 Hz voltage frequency the performances are reduced by 10÷15% and the power consumption is 58 VA

(2) Average values based on tests performed at nominal hydraulic condition and ambient/coil temperature of 20°C.

(3) When solenoid is energized, the inrush current is approx 3 times the holding current.

**9.2 COILS FOR SDKE/FV VALVE**

External supply nominal voltage ± 10%	Voltage code	Type of connector	Power consumption (2)	Code of spare coil
12 DC	<b>12 DC</b>	666 or 667	36 W	CAE-12DC
14 DC	<b>14 DC</b>			CAE-14DC
24 DC	<b>24 DC</b>			CAE-24DC
28 DC	<b>28 DC</b>			CAE-28DC
110 DC	<b>110 DC</b>			CAE-110DC
220 DC	<b>220 DC</b>			CAE-220DC
110/50/60 AC	<b>110/50/60 AC</b>	669	100 VA (3)	CAE-110/50/60AC (1)
230/50/60 AC	<b>230/50/60 AC</b>			CAE-230/50/60AC (1)
110/50/60 AC	<b>110 DC</b>	669	36 W	CAE-110DC
230/50/60 AC	<b>220 DC</b>			CAE-220DC

(1) In case of 60 Hz voltage frequency the performances are reduced by 10÷15% and the power consumption is 90 VA


(2) Average values based on tests performed at nominal hydraulic condition and ambient/coil temperature of 20°C.

(3) When solenoid is energized, the inrush current is approx 3 times the holding current.





**10 COILS ELECTRIC CONNECTORS - according to din 43650 (to be ordered separately)**

666, 667 (for AC or DC supply)		669 (for AC supply)		CONNECTOR WIRING		
				<b>666, 667</b> 1 = Positive ⊕ 2 = Negative ⊖ ⊕ = Coil ground		<b>669</b> 1,2= Supply voltage VAC 3 = Coil ground
<b>SUPPLY VOLTAGES</b>						
<b>666</b>		<b>667</b>		<b>669</b>		
All voltages		24 AC or DC 110 AC or DC 220 AC or DC		110/50 AC 110/60 AC 230/50 AC		

**11 TECHNICAL CHARACTERISTICS OF INDUCTIVE PROXIMITY AND POSITION SWITCHES**

Type of switch		<b>/FV position switch</b>	
Supply voltage [V]		20÷32	
Ripple max [%]		≤ 10	
Max current [mA]		400	
Max peak pressure [bar]		400	
Mechanical life		virtually infinite	
Switch logic		PNP	

**12 CONNECTING SCHEMES OF INDUCTIVE PROXIMITY AND POSITION SWITCHES - FV sensor's connector are always supplied with the valve**
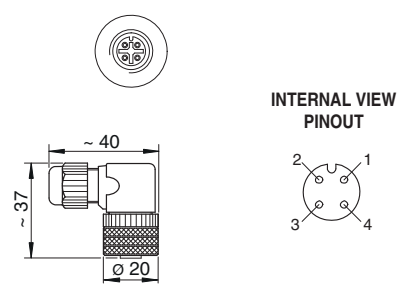
<p><b>/FV (all valves) single solenoid</b></p> <p>Connector type <b>ZBE-06</b> IP65</p>  <p>1 = supply +24 Vdc 2 = output signal NC 3 = GND 4 = output signal NO</p>	<p><b>/FV (all valves) double solenoid</b></p> <p>Connector type <b>ZBE-06</b> IP65</p>  <p>1 = supply +24 VDC 2 = output signal sol. <b>b</b> 3 = GND 4 = output signal sol. <b>a</b></p>	<p>Connector type <b>ZBE-06</b></p>  <p><b>INTERNAL VIEW PINOUT</b></p> 
---	---	--

**NOTE:** the /FV position switch are not provided with a protective earth connection

**13 STATUS OF OUTPUT SIGNAL**

<b>SDHE - SDKE</b>	Configuration <b>61</b>	Configuration <b>63</b>	Configuration <b>67</b>	Configuration <b>71</b>	Configuration <b>75</b>
Hydraulic configuration					
spool position	1 0	1 2	0 2	1 0 2	1 2
pin 2	ON	ON	ON	ON	ON
pin 2	OFF	OFF	OFF	OFF	OFF
pin 4	ON	ON	ON	ON	ON
pin 4	OFF	OFF	OFF	OFF	OFF


**Note:** FV position switch can be electrically wired by the customer as NO or NC and then the status of the output signal will be in accordance to the selected configuration

 = intermediate spool position corresponding to the hydraulic configuration change

**14 Q/ΔP DIAGRAMS** based on mineral oil ISO VG 46 at 50°C


**SDHE**

Flow direction Spool type	Flow direction				
	P→A	P→B	A→T	B→T	P→T
0, 0/1	A	A	C	C	D
1, 1/1, 1/9	D	C	C	C	
3, 3/1	D	D	A	A	
4, 4/8, 5, 5/1, 58, 58/1	F	F	G	C	E
1/2, 0/2	D	D	D	D	
6, 7	D	D	D	D	
2	D	D			
2/2	F	F			
19, 91	E	E	D	D	

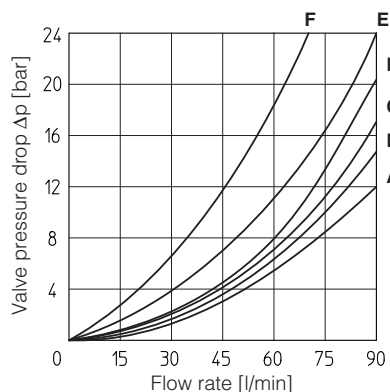

**SDKE**

Flow direction Spool type	Flow direction					
	P→A	P→B	A→T	B→T	P→T	B→A
0, 0/1, 0/2, 2/2	A	A	B	B		
1, 1/1, 1/9, 6, 8	A	A	D	C		
3, 3/1, 7	A	A	C	D		
4	B	B	B	B	F	
5, 58	A	B	C	C	G	
1/2	B	C	C	B		
19, 91	E	E	G	G		H
39, 93	F	F	G	G		H


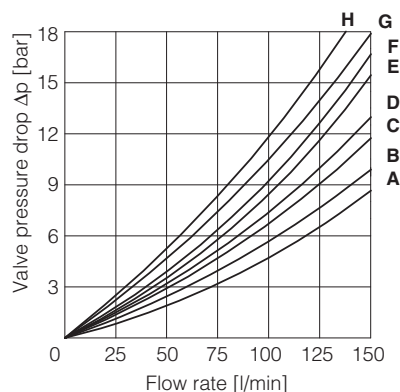


**15 OPERATING LIMITS** based on mineral oil ISO VG 46 at 50°C

The diagrams have been obtained with warm solenoids and power supply at lowest value ( $V_{nom} - 10\%$ ). The curves refer to application with symmetrical flow through the valve (i.e. P→A and B→T). In case of asymmetric flow and if the valves have the devices for controlling the switching times the operating limits must be reduced.



**SDHE**

Curve	Spool type	
	AC	DC
A	1, 1/2,	0, 0/1, 1, 1/2, 3
B	0, 0/1, 0/2, 1/1, 1/9, 3	0/2, 1/1, 6, 7, 1/9, 19
C	3, 3/1, 6, 7	3/1, 4, 4/8, 5, 5/1, 19, 58, 58/1, 91
D	4, 4/8, 5, 5/1, 19, 58, 58/1, 91	2, 2/2
E	2, 2/2	-

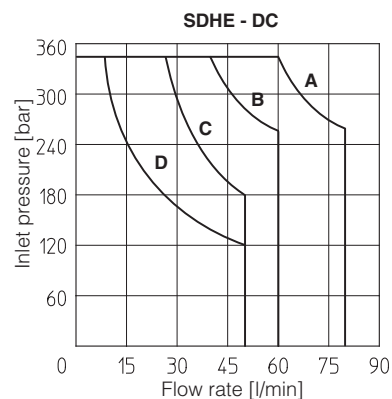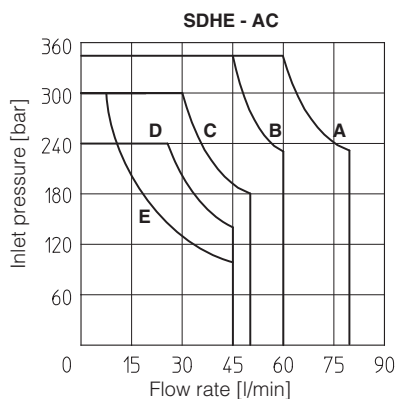


**SDKE**

Curve	Spool type	
	AC	DC
A	0/1	0, 0/1, 1, 1/1, 3, 3/1, 1/2, 0/2, 8
B	4, 5, 19, 91	6, 7
C	0, 1/1, 3, 3/1	19, 91
D	1, 1/2, 0/2	4, 5
E	6, 7, 8, 2/2	2/2

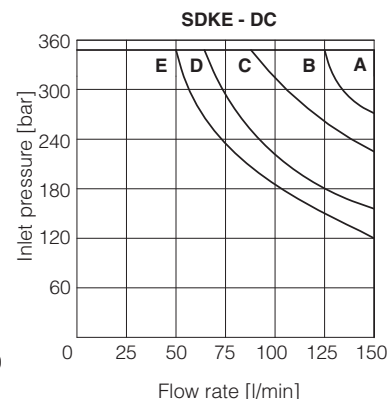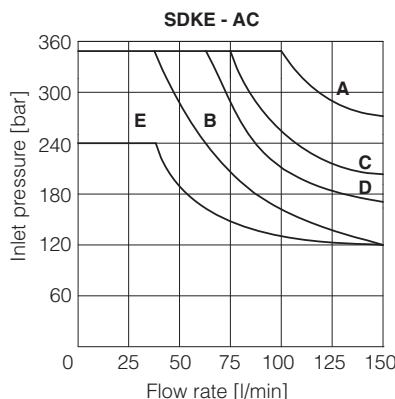

16 DIMENSIONS FOR SDHE/FV and SDKE/FV VALVES [mm]

**SDHE**



Valve's bottom view


**ISO 4401: 2005**  
**Mounting surface: 4401-03-02-0-05**  
 Fastening bolts:  
 4 socket head screws: M5x30 class 12.9  
 Tightening torque = 8 Nm  
 Seals: 4 OR 108  
 Ports P,A,B,T:  $\varnothing = 7.5$  mm (max)

**P** = PRESSURE PORT  
**A, B** = USE PORT  
**T** = TANK PORT

**option /A**


Single solenoid valves: solenoid mounted at side of port B.  
 Double solenoid valves SDHE/FV(DC): FV inductive position switch mounted at side of port A

**SDHE-06\*/FV (DC)**

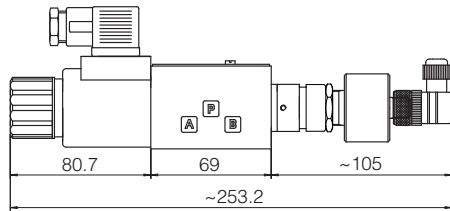


Mass: kg 1,95

**SDHE-06\*/FV (AC)**

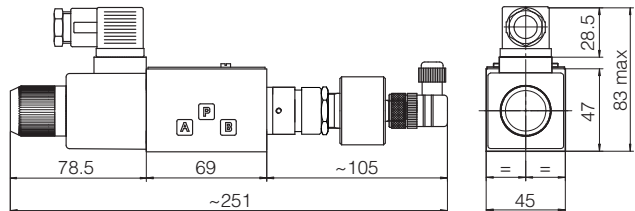


Mass: kg 1,8


**SDHE-07\*/FV (DC)**

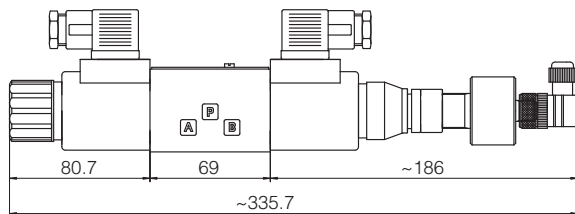

Mass: kg 2,2



**SDKE**



Valve's bottom view


**ISO 4401: 2005**  
**Mounting surface: 4401-05-05-0-05**  
**(without port X)**  
 Fastening bolts:  
 4 socket head screws M6x40 class 12.9  
 Tightening torque = 15 Nm  
 Seals: 5 OR 2050. 1 OR 108  
 Ports P,A,B,T:  $\varnothing = 11.5$  mm (max)  
 Ports Y:  $\varnothing = 5$  mm

**P** = PRESSURE PORT  
**A, B** = USE PORT  
**T** = TANK PORT  
**Y** = DRAIN PORT

**option /A**


Single solenoid valves: solenoid mounted at side of port B.  
 Double solenoid valves SDKE/FV(DC): FV inductive position switch mounted at side of port A

**SDKE-16\*/FV (DC)**

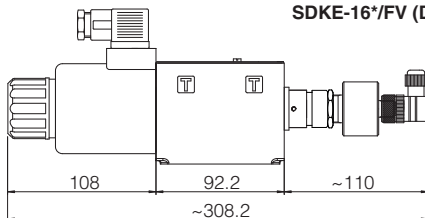


Mass: kg 4,4

**SDKE-17\*/FV (DC)**

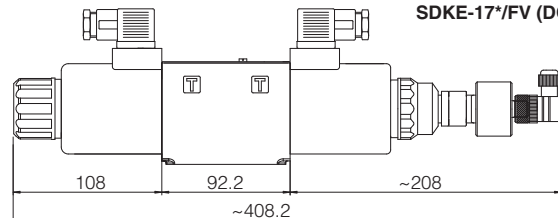

Mass: kg 5,9

**SDKE-16\*/FV (AC)**

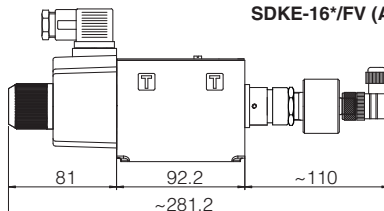

Mass: kg 3,8