


# Pressure relief valves type SAGAM

two stage, subplate mounting - ISO 6264 size 10, 20 and 32

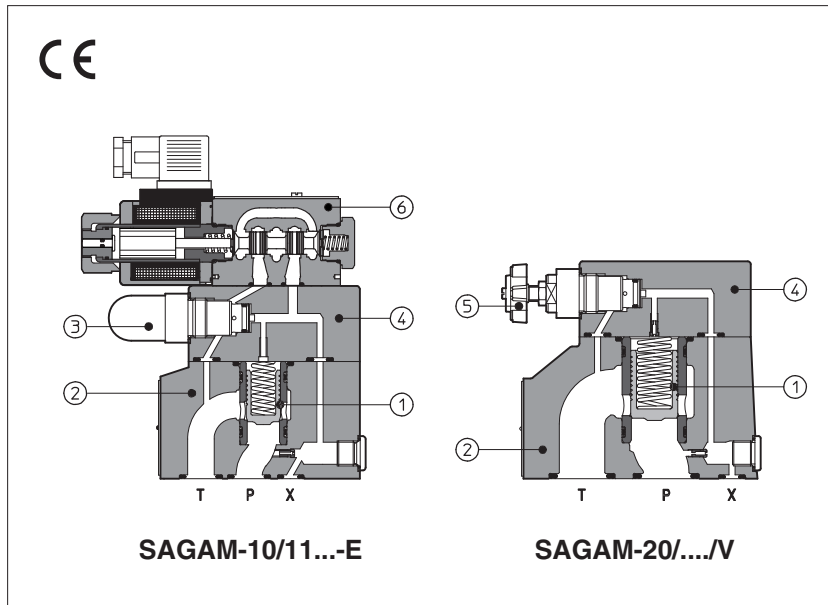

**SAGAM** are two stage pressure relief valves with balanced poppet, designed to operate in oil hydraulic systems.

In standard versions the piloting pressure of the poppet (1) of the main stage (2) is regulated by means of a grub screw protected by cap (3) in the cover (4).

Optional versions with setting adjustment by handwheel (5) instead of the grub screw are available on request.

Clockwise rotation increases the pressure.

SAGAM can be equipped with a SDHE pilot solenoid valve (6) for venting or for different pressure setting.

Mounting surface: **ISO 6264 size 10, 20 and 32**

Max flow: **200, 400 and 600 l/min**


Max pressure up to **350 bar**

**1 MODEL CODE**

<b>SAGAM</b>	-	<b>20</b>	/	<b>10</b>	/	<b>210</b>	/	<b>100/100</b>	<b>V</b>	-	<b>E</b>	<b>X</b>	<b>24DC</b>	**	/	*
<p><b>SAGAM</b> = pressure relief valve subplate mounting</p> <p>Size: <b>10 20 32</b></p> <p>Setting pressure and venting option:  <b>-</b> = one setting pressure without option  <b>10</b> = one setting pressure with venting, with de-energized solenoid  <b>11</b> = one setting pressure with venting, with energized solenoid  <b>20</b> = two setting pressure with venting, with de-energized solenoid  <b>21</b> = two setting pressure with venting, with energized solenoid  <b>22</b> = two setting pressure without venting  <b>32</b> = three setting pressure without venting</p> <p>Setting: see section 4 for available setting</p> <p>Pressure range of second/third setting (1):  <b>50</b> = 4÷50 bar      <b>100</b> = 6÷100 bar  <b>210</b> = 7÷210 bar      <b>350</b> = 8÷350 bar</p> <p>Options, see section 7  <b>E V WP Y</b></p> <p><b>X</b> = without connector (1):  See section 10 for available connectors, to be ordered separately  <b>-00-AC</b> = AC solenoid valve without coils  <b>-00-DC</b> = DC solenoid valve without coils</p> <p>Solenoid venting valve (1):  <b>E</b> = SDHE for AC and DC supply, with cURus certified solenoids  <b>L</b> = SDHL for AC and DC supply, compact execution</p> <p>Seals material, see section 11:  <b>-</b> = NBR  <b>PE</b> = FKM  <b>BT</b> = HNBR</p> <p>Series number</p> <p>Voltage code, see section 6 (1):</p>																

(1) Only for SAGAM with solenoid valve for venting and/or for the selection of the setting pressure

## 2 HYDRAULIC SYMBOLS

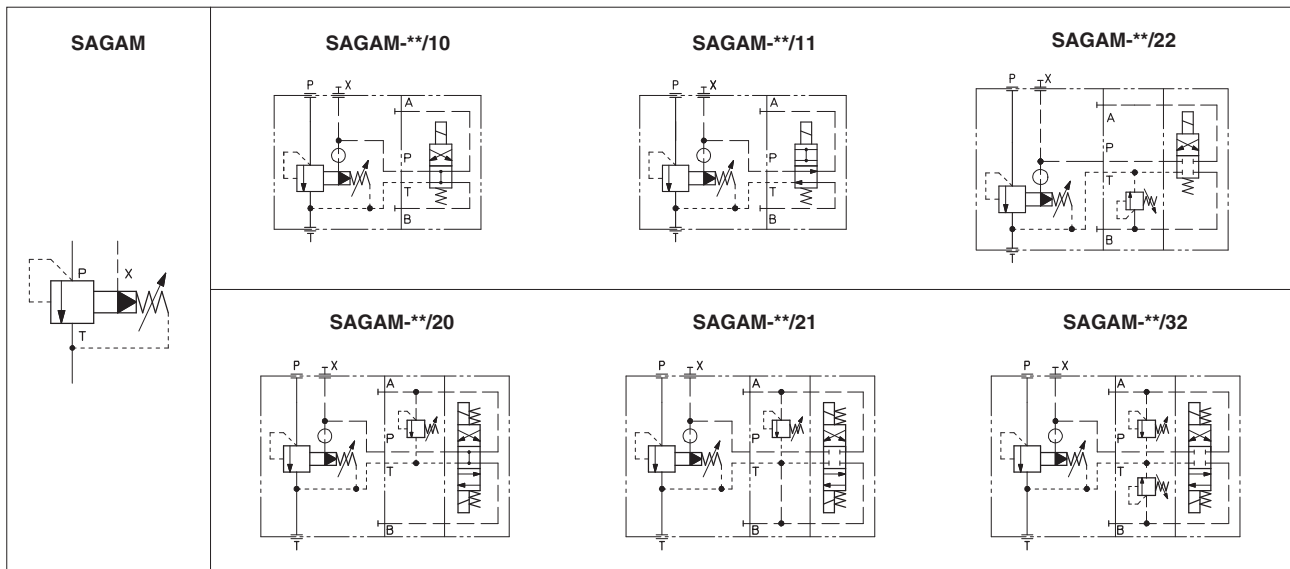

## 3 GENERAL CHARACTERISTICS

Assembly position	Any position	
Subplate surface finishing to ISO 4401	Acceptable roughness index, $R_a \leq 0,8$ recommended $R_a 0,4$ - flatness ratio 0,01/100	
MTTFd valves according to EN ISO 13849	75 years	
Ambient temperature range	<b>Standard</b> = $-30^\circ\text{C} \div +70^\circ\text{C}$ / <b>PE</b> option = $-20^\circ\text{C} \div +70^\circ\text{C}$ / <b>BT</b> option = $-40^\circ\text{C} \div +70^\circ\text{C}$	
Storage temperature range	<b>Standard</b> = $-30^\circ\text{C} \div +80^\circ\text{C}$ / <b>PE</b> option = $-20^\circ\text{C} \div +80^\circ\text{C}$ / <b>BT</b> option = $-40^\circ\text{C} \div +80^\circ\text{C}$	
Surface protection	Body: zinc coating with black passivation	Coil: zinc nickel coating (DC version) plastic incapsulation (AC version)
Corrosion resistance	Salt spray test (EN ISO 9227) > 200 h	

## 4 HYDRAULIC CHARACTERISTICS

Valve model	SAGAM-10	SAGAM-20	SAGAM-32
Setting [bar]	50;	100; 210;	350
Pressure range [bar]	4÷50;	6÷100; 7÷210;	8÷350
Max pressure [bar]	Ports P, X = 350 Ports T, Y = 210 (without pilot solenoid valve) For version with pilot solenoid valve, see technical tables E015 and E018		
Max flow [l/min]	200	400	600

## 5 ELECTRICAL CHARACTERISTICS (for SAGAM with pilot solenoid valve)

Insulation class	<b>H</b> (180°C) for DC coils; <b>F</b> (155°C) for AC coils Due to the occurring surface temperatures of the solenoid coils, the European standards EN ISO 13732-1 and EN ISO 4413 must be taken into account
Protection degree to DIN EN 60529	<b>IP 65</b> (with connectors correctly assembled)
Relative duty factor	100%
Supply voltage and frequency	See section 6
Supply voltage tolerance	$\pm 10\%$
Certification	<b>cURus</b> North American standard - only for SDHE pilot valve

**6 COIL VOLTAGE**

External supply nominal voltage ± 10%	Voltage code	Type of connector	-EX Power consumption (2)	-LX Power consumption (2)	Code of spare coil -EX	Code of spare coil -LX
12 DC	<b>12 DC</b>	666 or 667	30W	29W	COE-12DC	COL-12DC
14 DC	<b>14 DC</b>				COE-14DC	COL-14DC
110 DC	<b>110 DC</b>				COE-110DC	COL-110DC
220 DC	<b>220 DC</b>				COE-220DC	COL-220DC
110/50 AC (1)	<b>110/50/60 AC</b>	666 or 667	58VA (3)	58VA (3)	COE-110/50/60AC	COL-110/50/60AC
230/50 AC (1)	<b>230/50/60 AC</b>		58VA (3)		COE-230/50/60AC	COL-230/50/60AC

For other supply voltages available on request see technical tables E015, E018.

(1) Coil can be supplied also with 60 Hz of voltage frequency: in this case the performances are reduced by 10 ÷ 15% and the power consumption is 55 VA (SDHL) and 58 VA (SDHE)

(2) Average values based on tests performed at nominal hydraulic condition and ambient/coil temperature of 20°C.

(3) When solenoid is energized, the inrush current is approx 3 times the holding current.

**7 OPTIONS**




**/E** = external pilot

**/V** = regulating handwheel instead of grub screw protected by cap




**/WP** = prolonged manual override protected by rubber cap (only for SAGAM with pilot solenoid valve)

**/Y** = external drain (only for SAGAM with pilot solenoid valve)

**8 REGULATED PRESSURE VERSUS FLOW DIAGRAMS** based on mineral oil ISO VG 46 at 50°C

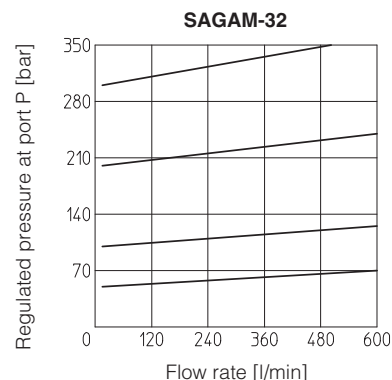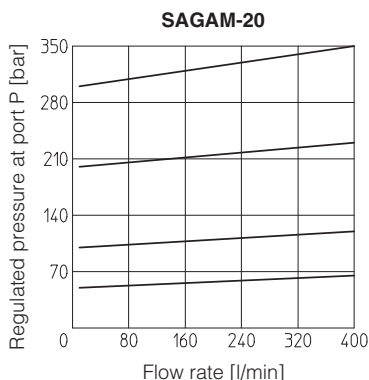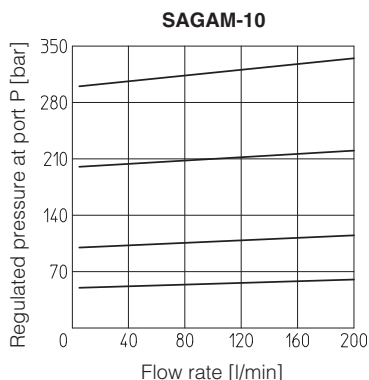

**9 MINIMUM PRESSURE VERSUS FLOW DIAGRAMS** based on mineral oil ISO VG 46 at 50°C

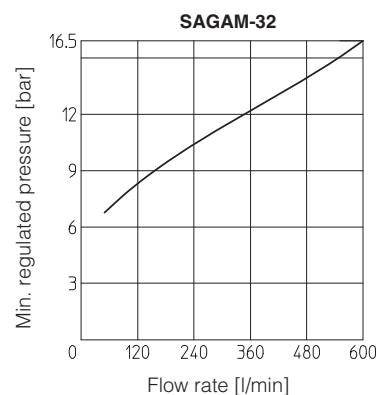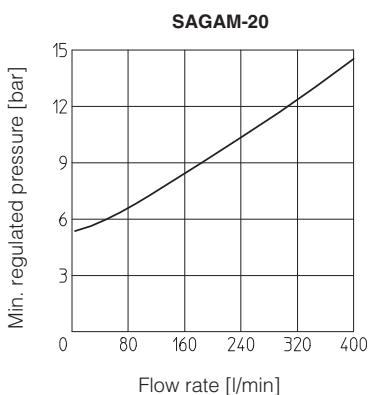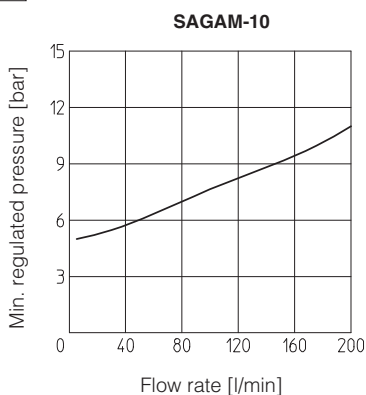

**10 ELECTRIC CONNECTORS ACCORDING TO DIN 43650 FOR SAGAM WITH SOLENOID VALVE**

The connectors must be ordered separately




Code of connector	Function
<b>666</b>	Connector IP-65, suitable for direct connection to electric supply source
<b>667</b>	As 666 connector IP-65 but with built-in signal led, suitable for direct connection to electric supply source

**11 SEALS AND HYDRAULIC FLUID** - for other fluids not included in below table, consult our technical office

Seals, recommended fluid temperature	NBR seals (standard) = -20°C ÷ +80°C, with HFC hydraulic fluids = -20°C ÷ +50°C FKM seals (/PE option) = -20°C ÷ +80°C HNBR seals (/BT option) = -40°C ÷ +60°C, with HFC hydraulic fluids = -40°C ÷ +50°C		
Recommended viscosity	15 ÷ 100 mm <sup>2</sup> /s - max allowed range 2,8 ÷ 500 mm <sup>2</sup> /s		
Max fluid contamination level	ISO4406 class 20/18/15 NAS1638 class 9, see also filter section at www.atos.com or KTF catalog		
<b>Hydraulic fluid</b>	<b>Suitable seals type</b>	<b>Classification</b>	<b>Ref. Standard</b>
Mineral oils	NBR, FKM, HNBR	HL, HLP, HLPD, HVLP, HVLPD	DIN 51524
Flame resistant without water	FKM	HFDR, HFDR	ISO 12922
Flame resistant with water	NBR, HNBR	HFC	

**12 DIMENSIONS [mm]**

**SAGAM-10**




Mass: 3,6 Kg

**ISO 6264: 2007**


**Mounting surface: 6264-06-09-1-97**

Fastening bolts:  
4 socket head screws  
M12x35 class 12.9  
Tightening torque = 125 Nm  
Seals: 2 OR 123; 1 OR 109/70  
Ports P, T: Ø = 14,5 mm  
Ports X: Ø = 3,2 mm




**SAGAM-10/10\*\*-EX  
SAGAM-10/11\*\*-EX**

Mass: 5,1 Kg




**SAGAM-10/20\*\*-EX  
SAGAM-10/21\*\*-EX**

Mass: 6,2 Kg




**SAGAM-10/22\*\*-EX**

Mass: 5,9 Kg




**SAGAM-10/32\*\*-EX**

Mass: 6,3 Kg




**SAGAM-10/10\*\*-LX  
SAGAM-10/11\*\*-LX**

Mass: 4,8 Kg




**SAGAM-10/20\*\*-LX  
SAGAM-10/21\*\*-LX**

Mass: 5,6 Kg



**SAGAM-10/22\*\*-LX**

Mass: 5,6 Kg





**SAGAM-10/32\*\*-LX**


Mass: 5,7 Kg

Overall dimensions refer to valves **DC** voltage, with connectors type 666

# SAGAM-20



Mass: 4,8Kg



view from X

## ISO 6264: 2007

### Mounting surface: 6264-08-11-1-97

Fastening bolts:


4 socket head screws M16x50 class 12.9

Tightening torque = 300 Nm

Seals: 2 OR 4112; 1 OR 109/70


Ports P, T:  $\varnothing = 24$  mm

Ports X:  $\varnothing = 3,2$  mm




### SAGAM-20/10/\*\*-EX SAGAM-20/11/\*\*-EX

Mass: 6,3 Kg




### SAGAM-20/20/\*\*-EX SAGAM-20/21/\*\*-EX

Mass: 7,4 Kg




### SAGAM-20/22/\*\*-EX

Mass: 7,1 Kg




### SAGAM-20/32/\*\*-EX

Mass: 7,5 Kg




### SAGAM-20/10/\*\*-LX SAGAM-20/11/\*\*-LX

Mass: 6 Kg




### SAGAM-20/20/\*\*-LX SAGAM-20/21/\*\*-LX

Mass: 6,8Kg



### SAGAM-20/22/\*\*-LX


Mass: 6,8 Kg




### SAGAM-20/32/\*\*-LX

Mass: 7 Kg

# SAGAM-32

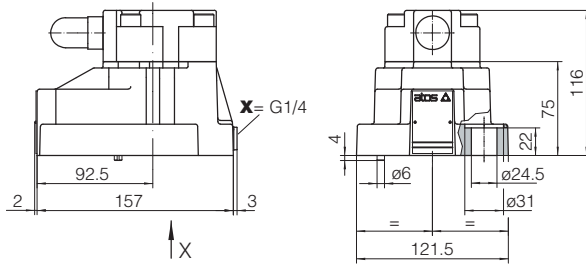

Mass: 6,2 Kg



**ISO 6264: 2007**

**Mounting surface: 6264-10-17-1-97  
(with M20 fixing holes instead of standard M18)**

Fastening bolts:


4 socket head screws M20x60 class 12.9

Tightening torque = 600 Nm

Seals: 2 OR 4131; 1 OR 109/70

Ports P, T:  $\varnothing = 28,5$  mm

Ports X:  $\varnothing = 3,2$  mm

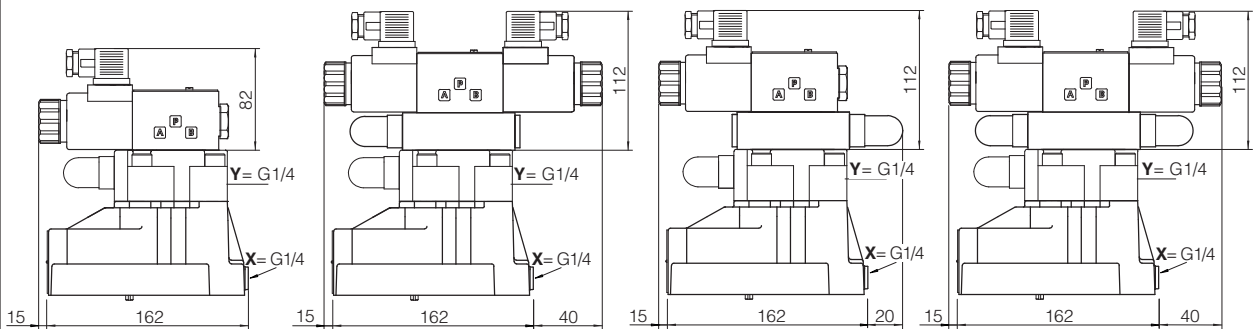

**SAGAM-32/10/\*\*-EX  
SAGAM-32/11/\*\*-EX**

Mass: 7,7 Kg

**SAGAM-32/20/\*\*-EX  
SAGAM-32/21/\*\*-EX**


Mass: 8,8 Kg

**SAGAM-32/22/\*\*-EX**

Mass: 8,5 Kg

**SAGAM-32/32/\*\*-EX**

Mass: 8,9 Kg

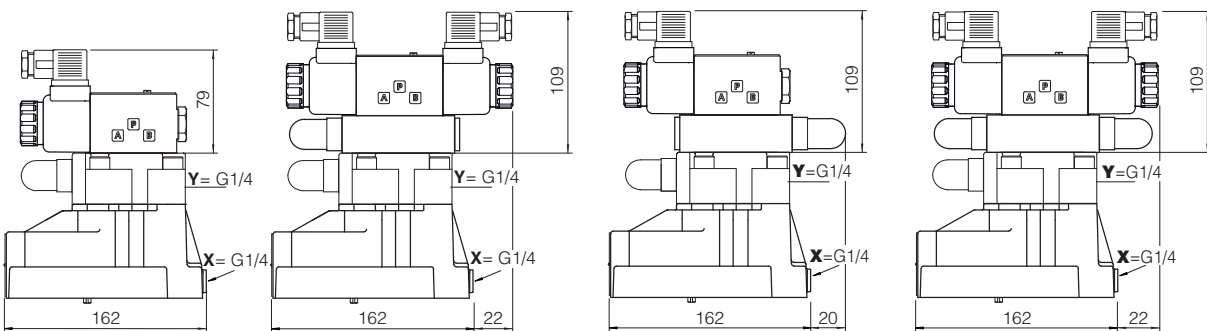

**SAGAM-32/10/\*\*-LX  
SAGAM-32/11/\*\*-LX**

Mass: 7,4 Kg

**SAGAM-32/20/\*\*-LX  
SAGAM-32/21/\*\*-LX**

Mass: 8,2 Kg

**SAGAM-32/22/\*\*-LX**

Mass: 8,2 Kg

**SAGAM-32/32/\*\*-LX**

Mass: 8,4 Kg

Overall dimensions refer to valves **DC** voltage, with connectors type 666