


Solenoid directional valves type DHU, DHO

direct operated, ISO 4401 size 06

obsolete components - availability on request

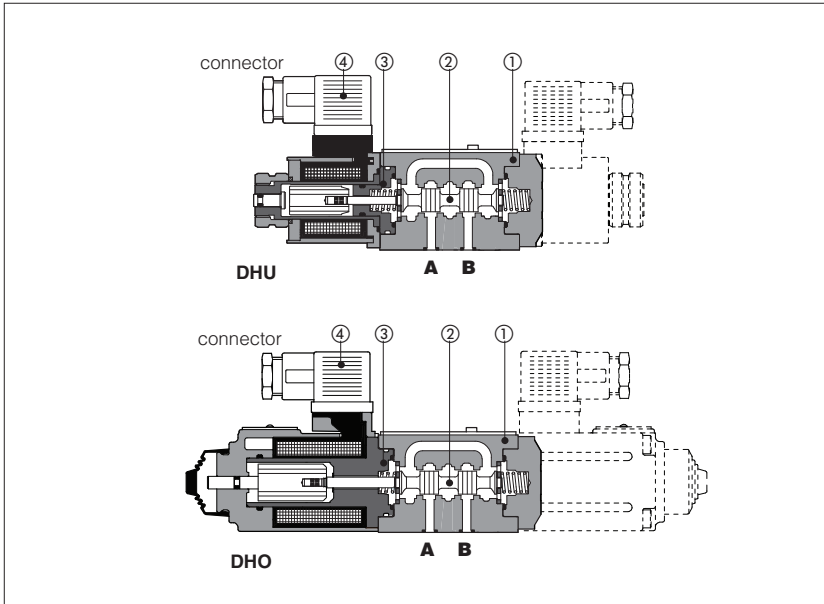

DHU and DHO are spool type, three or four way, two or three position direct operated solenoid valves designed to operate in oil hydraulic systems.

They are operated by wet and pressure sealed solenoid (3) with manual override and with coils certified according the North American standard **C UR US**:

- **DHU** for DC supply;
- **DHO** for DC supply with high performance.

Moving parts are protected, lubricated and cushioned in oil.

Shell-moulding casting (1) machined by transfer lines and then cleaned by thermal deburring.

Optimized flow paths largely cored with extrawide channels to tank for low pressure drops.

Interchangeable spools (2) available in a wide variety of configurations.

DHU and DHO valves can be supplied with optional devices for control of switching times.

Standard electric/electronic connectors (4) able to satisfy the requirements of modern machines for electric interfaces characteristics.

Coils are fully encapsulated (class H).

In DHU, coils are easily replaceable without aid of tools.

Rugged execution suitable for outdoor use.

Surface mounting ISO 4401 size 06.
Max flow up to 60 l/min for DHU and up to 80 l/min for DHO.
Max pressure: 350 bar.

1 MODEL CODE

DHU - 0 63 1/2 /A - X 24 DC ** /*

Directional control valves size 06
DHU-0 = for DC supply
DHO-0 = for DC supply, high performances

Valve configuration, see table 2
61 = single solenoid, center plus external position, spring centered
63 = single solenoid, 2 external positions, spring offset
67 = single solenoid, center plus external position, spring offset
70 = double solenoid, 2 external positions, without springs
71 = double solenoid, 3 positions, spring centered
75 = double solenoid, 2 external positions, with detent
77 = double solenoid, center plus external position, without springs
Other configurations are available on request.

Spool type, see table 3.

Options, see note 1 at section 5.

Synthetic fluids
WG = water glycol
PE = phosphate ester


Series number

Voltage code, see section 6
00 = valve without coils (only for DHU).


X = without connector
See note 2 at section 5 for available connectors, to be ordered separately
Coils with special connectors, see section 10 (only for DHU)
XJ = AMP Junior Timer connector
XK = Deutsch connector
XS = Lead Wire connection

Note: configuration 63, 70 and 75 are available only with spools type 0/2, 1/2 and 2/2.

2 CONFIGURATION

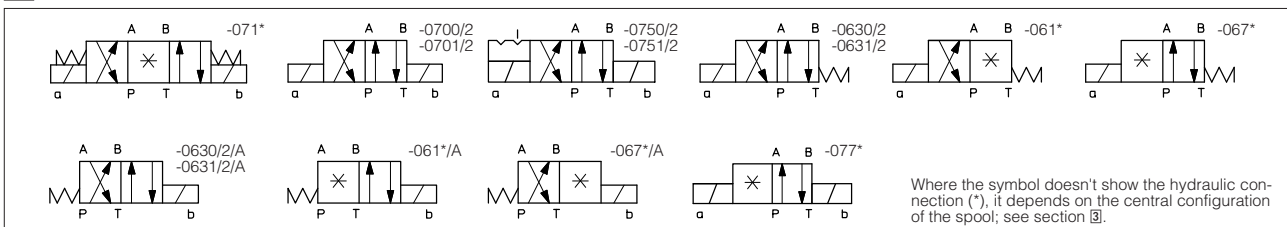

3 SPOOLS - for intermediate passages, see tab. E001.

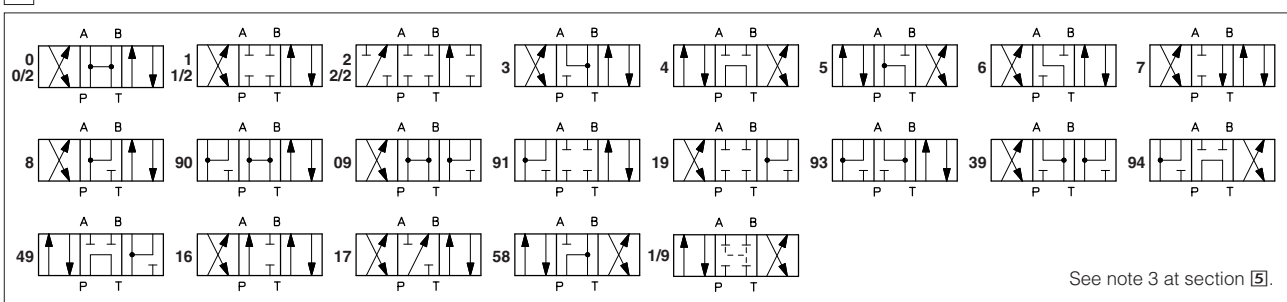

See note 3 at section 5.

4 MAIN CHARACTERISTICS OF DHU AND DHO DIRECTIONAL VALVES

| | |
|--|--|
| Assembly position / location | Any position for all valves except for type - 070* (without springs) that must be installed with horizontal axis if operated by impulses |
| Subplate surface finishing | Roughness index $\sqrt{0.4}$ flatness ratio 0,01/100 (ISO 1101) |
| Ambient temperature | from -20°C to +70°C |
| Fluid | Hydraulic oil as per DIN 51524 535; for other fluids see section 11 |
| Recommended viscosity | 15 ÷ 100 mm ² /s at 40°C (ISO VG 15 ÷ 100) |
| Fluid contamination class | ISO 19/16, achieved with in line filters at 25 µm value to β ₂₅ µ 75 (recommended) |
| Fluid temperature | -20°C +60°C (standard and /WG seals) -20°C +80°C (/PE seals) |
| Flow direction | As shown in the symbols of tables 2 and 3 |
| Operating pressure For versions with proximity switches (/FI/NC and /FI/NO versions) maximum counter pressure allowed on T port is 5 bar | Ports P,A,B: 350 bar ; Port T 210 bar |
| Rated flow | See diagrams Q/Δp at section 7 |
| Maximum flow | 60 l/min for DHU, 80 l/min for DHO, see operating limits at section 8 |

4.1 Coils characteristics

| | |
|---------------------------------------|--|
| Insulation class | H (180°C) Due to the occurring surface temperatures of the solenoid coils, the European standards EN563 and EN982 must be taken into account |
| Connector protection degree DIN 43650 | IP 65 |
| Relative duty factor | 100% |
| Supply voltage and frequency | See electric feature 6 |
| Supply voltage tolerance | ± 10% |
| Certification | C UR US |

5 NOTES

1 Options

- A** = Solenoid mounted at side of port B (only for single solenoid valves). In standard versions, solenoid is mounted at side of port A.
WP = prolonged manual override protected by rubber cap (standard for DHO models) - see section 12.
L1, L2, L3 = device for switching time control, installed in the valve solenoid (only for DHU and DHO models).
 For spools 4 and 4/8 only device L3 is available.
F* = with proximity switch for monitoring spool position: see tab. E110.
MV, MO = auxiliary hand lever positioned vertically (MV) or horizontally (MO). For available configuration and dimensions see table E138.

2 Type of electric/electronic connector DIN 43650, to be ordered separately

- SP-666** = standard connector IP-65, suitable for direct connection to electric supply source.
SP-667 = as SP-666, but with built-in signal led.
SP-669 = with built-in rectifier bridge for supplying DC coils by alternate current (AC 110V and 230V - I_{max} 1A).
E-SD = electronic connector which eliminates electric disturbances when solenoid valves are de-energized.

3 Spools

- spools type **0/2, 1/2, 2/2** are only used for two position valves: single solenoid valves, type DH*-063*/2 and double solenoid valves type DH*-070*/2 and DH*-075*/2.
- spools type **0** and **3** are also available as **0/1** and **3/1** with restricted oil passages in central position, from user ports to tank.
- spools type **1, 4** and **5** are also available as **1/1, 4/8** and **5/1**. They are properly shaped to reduce water-hammer shocks during the swiching.
- spools type **1, 3, 8** and 1/2 are available as **1P, 3P, 8P** and **1/2P** to limit valve internal leakages.
- spool type **1/9** has closed center in rest position but it avoids the pressurization of A and B ports due to the internal leakages.
- Other types of spools can be supplied on request.

6 ELECTRIC FEATURES



| Valve | External supply nominal voltage ± 10% | Voltage code | Type of connector | Power consumption (2) | Code of spare coil | Colour of coil label |
|------------------------|---------------------------------------|----------------|-------------------|-----------------------|--------------------|----------------------|
| DHU | 6 DC | 6 DC | SP-666 or SP-667 | 33 W | DHU | |
| | 9 DC | 9 DC | | | SP-COU-6DC / 80 | brown |
| | 12 DC | 12 DC | | | SP-COU-9DC / 80 | light blue |
| | 14 DC | 14 DC | | | SP-COUR-12DC / 10 | green |
| | 18 DC | 18 DC | | | SP-COUR-14DC / 10 | brown |
| | 24 DC | 24 DC | | | SP-COU-18DC / 80 | blue |
| | 28 DC | 28 DC | | | SP-COUR-24DC / 10 | red |
| | 48 DC | 48 DC | | | SP-COUR-28DC / 10 | silver |
| | 110 DC | 110 DC | | | SP-COU-48DC / 80 | silver |
| | 125 DC | 125 DC | | | SP-COUR-110DC / 10 | black |
| | 220 DC | 220 DC | | | SP-COU-125DC / 80 | silver |
| | 220 DC | 220 DC | | | SP-COUR-220DC / 10 | black |
| | 110/50 AC 120/60 AC | 110RC | SP-669 | 40 VA 35 VA | SP-COUR-110RC / 10 | gold |
| 230/50 AC 230/60 AC | 230RC | 40 VA 35 VA | | SP-COUR-230RC / 10 | blue | |

- (1) Coil can be supplied also with 60 Hz of voltage frequency: in this case the performances are reduced by 10 ÷ 15% and the power consumption is 55 VA.
 (2) Average values based on tests preformed at nominal hydraulic condition and ambient/coil temperature of 20°C.
 (3) When solenoid is energized, the inrush current is approx 3 times the holding current. Inrush current values correspond to a power consumption of about 150 VA.

| Valve | External supply nominal voltage ± 10% | Voltage code | Type of connector | Power consumption (2) | External supply nominal voltage ± 10% | Voltage code | Type of connector | Power consumption (2) |
|-------|---------------------------------------|---------------|-------------------|-----------------------|---------------------------------------|---------------|-------------------|-----------------------|
| DHO | 12 DC | 12 DC | SP-666 or SP-667 | 32 W | 110/50 AC | 110 DC | SP-669 | 40 W |
| | 24 DC | 24 DC | | | 120/60 AC | | | 35 W |
| | 110 DC | 110 DC | | 40W | 230/50 AC | 220 DC | | 40 W |
| | 220 DC | 220 DC | | | 230/60 AC | | | 35 W |


7 Q/ΔP DIAGRAMS based on mineral oil ISO VG 46 at 50°C

| Flow direction | P@A | P@B | A@T | B@T | P@T |
|----------------|-----|-----|-----|-----|-----|
| Spool type | | | | | |
| 0 | C | C | C | C | |
| 0/2, 1, 1/2 | A | A | A | A | |
| 2, 3 | A | A | C | C | |
| 2/2, 4, 5, 9* | D | D | D | D | A |
| 6 | A | A | C | A | |
| 7 | A | A | A | C | |
| 8 | C | C | B | B | |

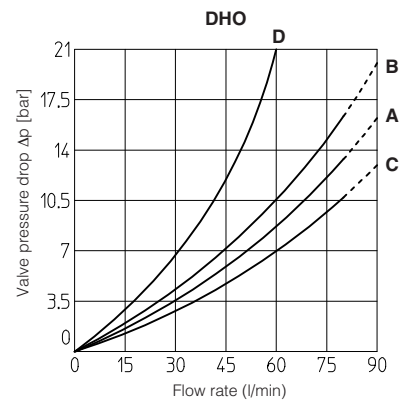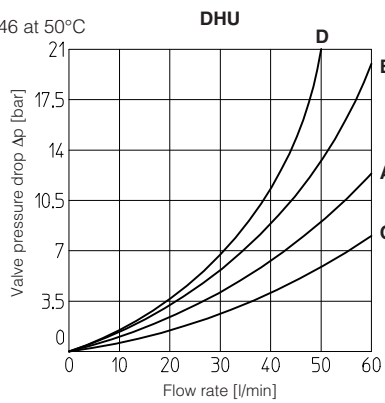


8 OPERATING LIMITS based on mineral oil ISO VG 46 at 50°C

The diagrams have been obtained with warm solenoids and power supply at lowest value ($V_{nom} - 10\%$). The curves refer to application with symmetrical flow through the valve (i.e. P@A and B@T). In case of asymmetric flow and if the valves have the devices for controlling the switching times the operating limits must be reduced.

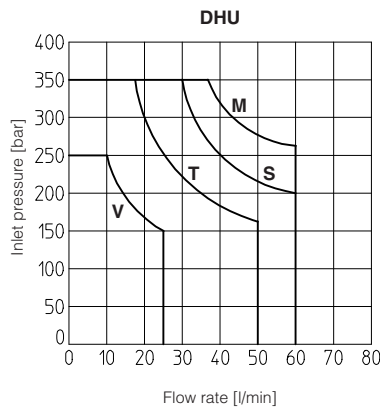

M = Spools 0, 1, 1/2, 8
S = Spools 0/2, 3, 6, 7
V = Spools 2, 2/2, *9, 9*
T = Spools 4, 5

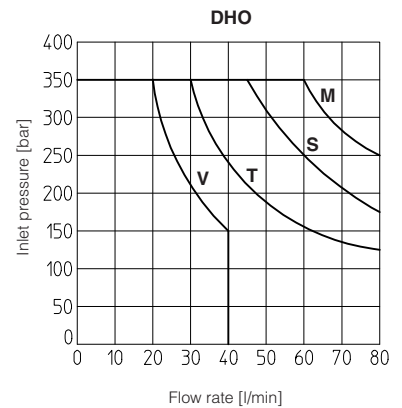

M = Spools 0, 1, 1/2, 8
S = Spools 0/2, 3, 6, 7
V = Spools 2, 2/2, *9, 9*
T = Spools 4, 5

9 SWITCHING TIMES (average values in msec)

Test conditions:


- 36 l/min; 150 bar
- nominal voltage
- 2 bar of counter pressure on port T
- mineral oil: ISO VG 46 at 50°C.

The elasticity of the hydraulic circuit and the variations of the hydraulic characteristics and temperature affect the response time.

| Valve | DHU | | |
|------------------------|--------------|--------------|------------|
| | Switch-on AC | Switch-on DC | Switch-off |
| DHU + SP-666 SP-667 | — | 45 | 20 |
| DHU + SP-669 | 45 | — | 80 |
| DHU + E-SD | — | 45 | 50 |
| DHU-*/L1 | — | 60 | 60 |
| DHU-*/L2 | — | 80 | 80 |
| DHU-*/L3 | — | 110 | 150 |


| Valve | DHO | | |
|------------------------|--------------|--------------|------------|
| | Switch-on AC | Switch-on DC | Switch-off |
| DHO + SP-666 SP-667 | — | 50 | 20 |
| DHO + SP-669 | 50 | — | 80 |
| DHO + E-SD | — | 50 | 50 |
| DHO-*/L1 | — | 60 | 60 |
| DHO-*/L2 | — | 80 | 80 |
| DHO-*/L3 | — | 150 | 150 |

10 COILS TYPE COU* and COUR* WITH SPECIAL CONNECTORS (only for DHU)

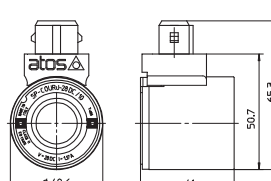


Options -XJ

Coil type SP-COUJ, SP-COURJ
AMP Junior Timer connector
Protection degree IP67

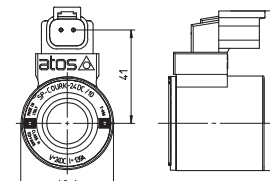

Options -XK

Coil type SP-COURK
(not available for COU)
Deutsch connector
DT-04-2P male
Protection degree IP67

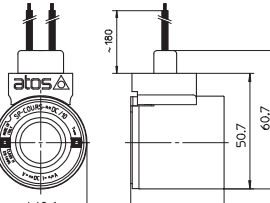


Options -XS

Coil type SP-COUS, SP-COURS
Lead Wire connection
Cable length = 180 mm

Note: The above coils are available only for voltage supply 12, 14, 24 and 28 Vdc. For the characteristics refer to standard coils features - see sect. 6


11 DIMENSIONS [mm]




ISO 4401: 2005
Mounting surface: 4401-03-02-0-05
 Fastening bolts:
 4 socket head screws M5x50 class 12.9
 Tightening torque = 8 Nm
 Seals: 4 OR 108
 Ports P,A,B,T: $\varnothing = 7.5$ mm (max).

P = PRESSURE PORT
A, B = USE PORT
T = TANK PORT
 For the max pressures on ports, see section 4


DHU-06



Mass: 1,5 kg




DHU-07

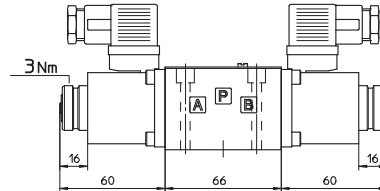


Mass: 1,8 kg


DHO-06



Mass: 1,9 kg




DHO-07

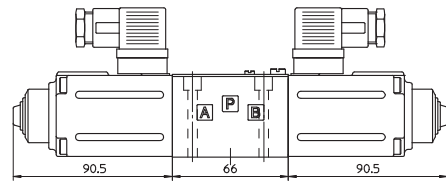

Mass: 2,6 kg

Overall dimensions refer to valves with connectors type SP-666

12 OPTION /WP (for DHU)

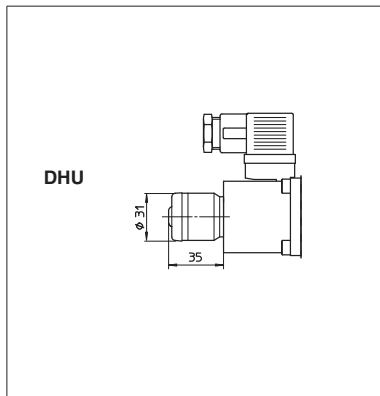

13 ELECTRIC CONNECTORS ACCORDING TO DIN 43650

The connectors must be ordered separately

| SP-666, SP-667 (for AC or DC supply) | | SP-669 (for AC supply) | |
|--|--|--|--|
| | | | |
| CONNECTOR WIRING | | | |
| SP-666, SP-667 1 = Positive ⊕ 2 = Negative ⊖ ⊕ = Coil ground | | SP-669 1,2 = Supply voltage V _{AC} 3 = Coil ground | |
| SUPPLY VOLTAGES | | | |
| SP-666 All voltages | SP-667 24 AC or DC 110 AC or DC 220 AC or DC | 110/50 AC 110/60 AC 230/50 AC 230/60 AC | |

Note: for electronic connectors type E-SD, see tab. K500

14 MOUNTING SUBPLATES

| Model | Ports location | GAS Ports A-B-P-T | Ø Counterbore [mm] A-B-P-T | Mass [kg] |
|--------|---|-------------------|----------------------------|-----------|
| BA-202 | Ports A, B, P, T underneath; | 3/8" | – | 1,2 |
| BA-204 | Ports P, T underneath; ports A, B on lateral side | 3/8" | 25,5 | 1,8 |
| BA-302 | Ports A, B, P, T underneath | 1/2" | 30 | 1,8 |

The subplates are supplied with 4 fastening bolts M5x50. Also available are multi-station subplates and modular subplates. For further details see table K280.