


# Intrinsically safe solenoid directional valves type **DHWL8**

on-off spool type, direct - **low leakage** - **ATEX, IECEx, EAC**

**Availability and price only on request**

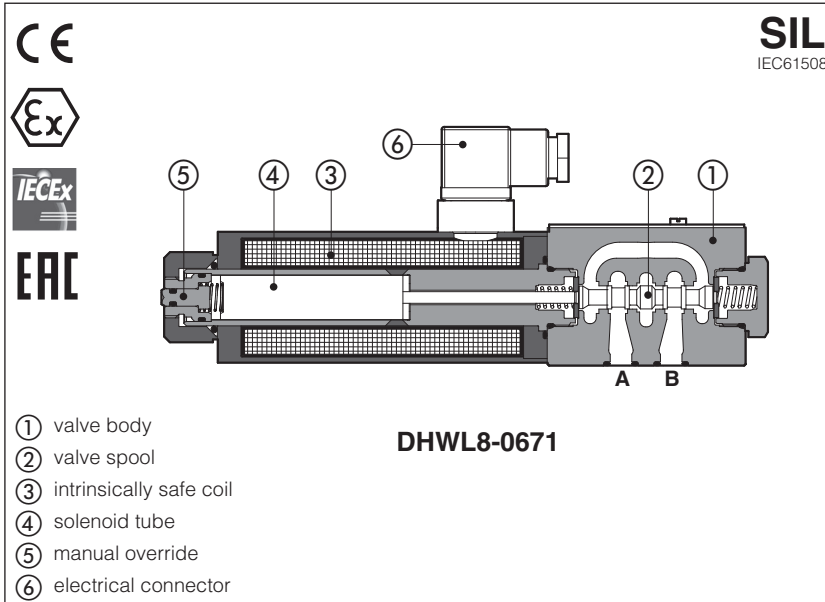

**DHWL8**

On-off, spool type directional valves in low voltage execution, equipped with intrinsically safe solenoids certified for safe operation in hazardous environment with potentially explosive atmosphere.

Certifications:

- Multicertification **ATEX, IECEx, EAC:**  
**II 1G Ex ia IIC, IIB, IIA**  
surface plants zone 0, 1 and 2
- Multicertification **ATEX or IECEx:**  
**IM1 Ex ia IMA**  
tunnels or mining plants

DHWL8 are **SIL** compliance with IEC 61508

See section [11] for certification data


The valves must be electrically powered through specific "safety barriers" limiting the max current to the solenoid, see section [14]

Size: **06**

Max flow: up to **25 l/min**


Max pressure: **350 bar**

**1 MODEL CODE**

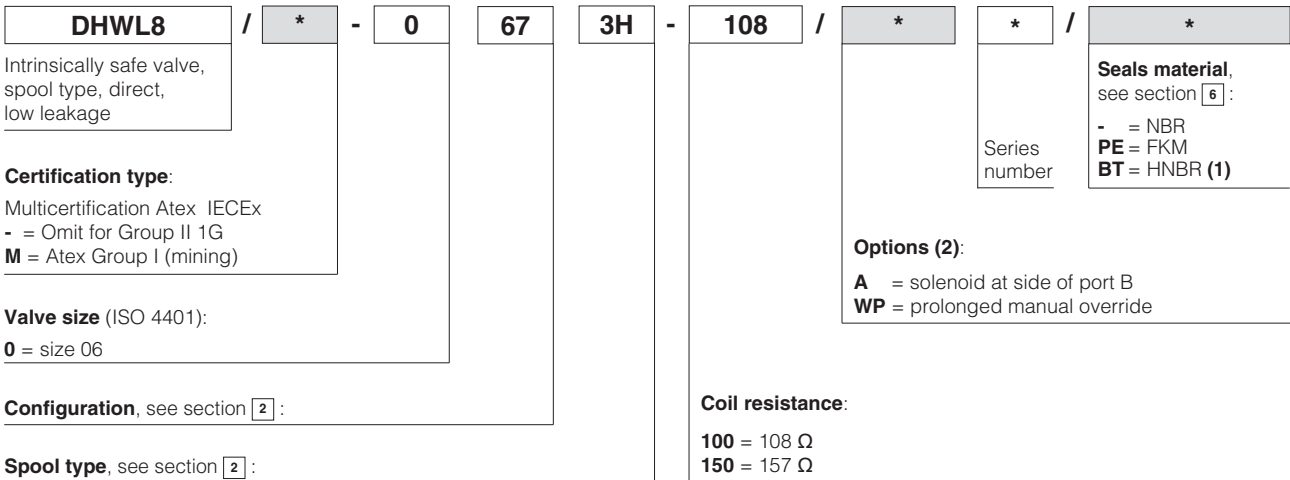


(1) Not for certification **M** Group I (mining)

(2) Possible combined options: **AWP**

 The pressure at T port makes difficult the manual override operation that can be possible only if its value is lower than 50 bar

**2 CONFIGURATIONS and SPOOLS** (representation according to ISO 1219-1)

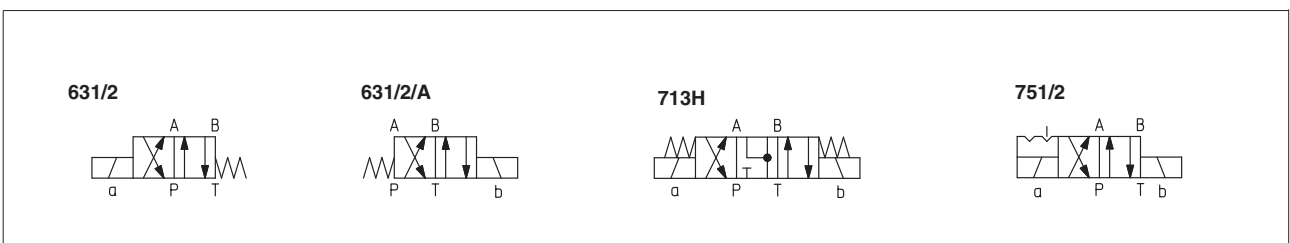

### 3 GENERAL CHARACTERISTICS

Assembly position / location	Any position, horizontal recommended
Subplate surface finishing to ISO 4401	Acceptable roughness index, Ra ≤0,8 recommended Ra 0,4 - flatness ratio 0,01/100)
MTTFd values according to EN ISO 13849	150 years, for further details see technical table P007
Ambient temperature	<b>Standard</b> = -20°C ÷ +60°C <b>/PE</b> option = -20°C ÷ +70°C <b>/BT</b> option = -40°C ÷ +70°C
Storage temperature range	<b>Standard</b> = -20°C ÷ +80°C <b>/PE</b> option = -20°C ÷ +80°C <b>/BT</b> option = -40°C ÷ +70°C
Surface protection	Zinc coating with black passivation - salt spray test (EN ISO 9227) > 200h
Compliance	Intrinsically safe protection "Ex ia", see section 11 RoHs Directive 2011/65/EU as last update by 2015/863/EU REACH Regulation (EC) n°1907/2006

### 4 HYDRAULIC CHARACTERISTICS

Operating pressure	Ports P,A,B: <b>350</b> bar; Port T <b>160</b> bar
Rated flow	See Q/Δp diagrams at section 7
Maximum flow	<b>25 l/min</b> , see operating limits at section 8

### 5 ELECTRICAL CHARACTERISTICS - see also section 11

Nominal resistance at 20°C	108 Ω	157 Ω
Coil insulation	Class H	
Working voltage	12 ÷ 26 V	
Minimum supply current (1)	90 mA	70 mA
Protection degree	IP65	
Duty factor	100%	
Electrical connector	DIN 43650 2 pin+GND	

(1) minimum current supplied from the I.S. barrier necessary to grant the valve operating limits reported in section 14

### 6 SEALS AND HYDRAULIC FLUIDS - for other fluids not included in below table, consult our technical office

Seals, recommended fluid temperature	NBR seals (standard) = -20°C ÷ +60°C, with HFC hydraulic fluids = -20°C ÷ +50°C FKM seals (/PE option) = -20°C ÷ +80°C HNBR seals (/BT option) = -40°C ÷ +60°C, with HFC hydraulic fluids = -40°C ÷ +50°C		
Recommended viscosity	15 ÷ 100 mm <sup>2</sup> /s - max allowed range 2.8 ÷ 500 mm <sup>2</sup> /s		
Max fluid contamination level	ISO 4406 class 20/18/15 NAS 1638 class 9, see also filter section at www.atos.com or KTF catalog		
<b>Hydraulic fluid</b>	<b>Suitable seals type</b>	<b>Classification</b>	<b>Ref. Standard</b>
Mineral oils	NBR, FKM, HNBR	HL, HLP, HLPD, HVLP, HVLPD	DIN 51524
Flame resistant without water	FKM	HFDR, HFDR	ISO 12922
Flame resistant with water	NBR, HNBR	HFC	


⚠ The ignition temperature of the hydraulic fluid must be 50°C higher than the max solenoid surface temperature

#### (1) Performance limitations in case of flame resistant fluids with water:


-max operating pressure = 210 bar      -max fluid temperature = 50°C

**7 Q/ΔP DIAGRAMS** based on mineral oil ISO VG 46 at 50°C

	Flow direction			
	<b>P→A</b>	<b>P→B</b>	<b>A→T</b>	<b>B→T</b>
Valve				
DHWL8-0631/2	B	A	A	B
DHWL8-0751/2	A	A	A	A

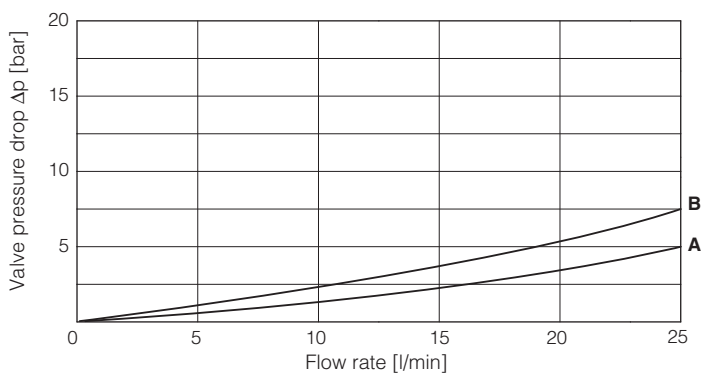

	Flow direction				
	<b>P→A</b>	<b>P→B</b>	<b>A→T</b>	<b>B→T</b>	<b>A→T B→T center</b>
Valve					
DHWL8-0713H	A	A	B	B	C

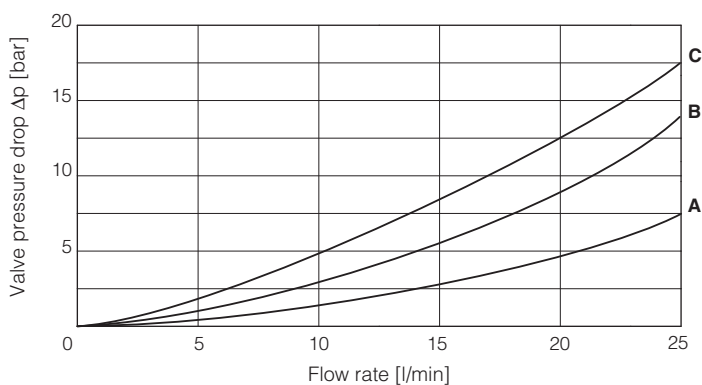


**8 OPERATING LIMITS** based on mineral oil ISO VG 46 at 50°C

The curves refer to application with symmetrical flow through the valve (i.e. P→A and B→T). In case of asymmetric flow and if the valves have the devices for controlling the switching times the operating limits must be reduced.


Curve	valve type
<b>A</b>	DHWL8-0751/2 (1)
<b>B</b>	DHWL8-0631/2 (1)

(1) Same limits for both version 108Ω and 150Ω

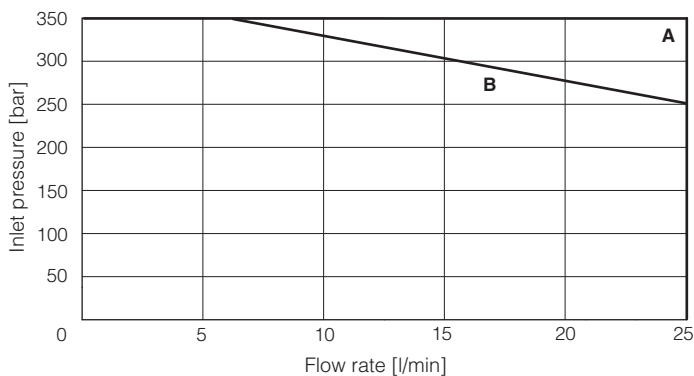



Curve	valve type
<b>C</b>	DHWL8-0713H/100
<b>D</b>	DHWL8-0713H/150

note: valve P/Q limits depends to the current supply provided from the intrinsically safe barrier. In the diagrams are reported the P/Q limits at current 70 mA for 150Ω version, and 90 mA for 108Ω version.

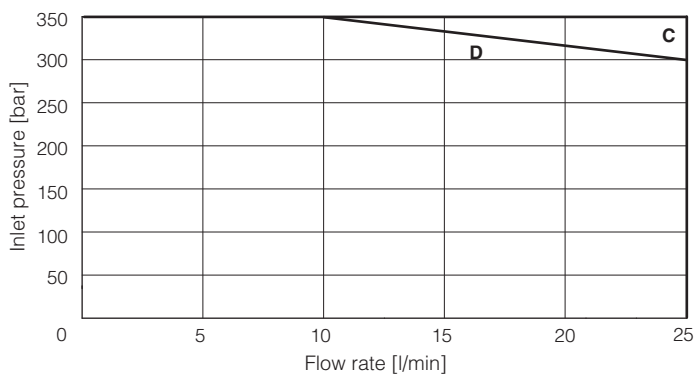

**9 INTERNAL LEAKAGES** based on mineral oil at viscosity 15 cSt

Spool type	center pos.	<b>P→A</b> <b>B→T</b>	<b>P→B</b> <b>A→T</b>
1/2		A	A
3H	C	B	B

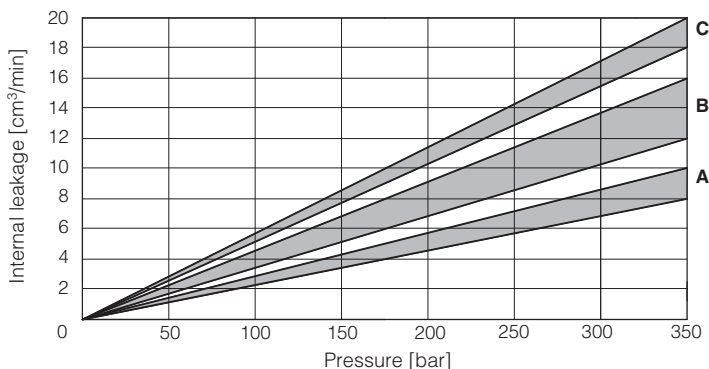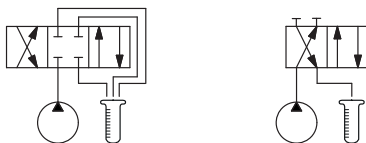

**10 SWITCHING TIME**

**DHWL8-\*/100**

P (bar)	Switch-on (ms)	Switch-off (ms)
50	120	25
100	150	30
150	170	30
210	180	35

**DHWL8-\*/150**

P (bar)	Switch-on (ms)	Switch-off (ms)
50	140	25
100	180	30
150	190	30
210	220	35

**11 CERTIFICATION DATA**

Valve type	DHWL8		DHWL8/M	
Certification	ATEX, IECEx (Group II), EAC		ATEX, IECEx (Group I)	
Solenoid code	COW-100, COW-150		COW-100M, COW-150M	
Type examination certificate (1)	ATEX: TUV IT 22 ATEX 051X; IECEx: IECEx TPS 22.0057X;		EAC:RU C - IT.AJK38.B.00425/21	
Method of protection	<ul style="list-style-type: none"> <li>• ATEX, Ex II 1G Ex ia IIC T6/T5 Ga</li> <li>• IECEx Ex ia IIC T6/T5 Ga</li> </ul>		<ul style="list-style-type: none"> <li>• EAC 1Ex ia IIC T6/T5 Ga X</li> <li>• ATEX, Ex ia IIC T6...T5 Ga</li> <li>• IECEx Ex ia I Ma</li> </ul>	
Temperature class	T6		T5	-
Electrical characteristics (max values)	Ci , Li	≅ 0	≅ 00	≅ 0
	Ui [V]	30V	30V	30V
	Ii [mA]	800mA	2200mA	2200mA
	Pi [W]	3W	6.82W	6.82W
Ambient temperature	Standard: -20 ÷ +60°C /BT option: -40 ÷ +60°C	Standard: -20 ÷ +45°C /BT option: -40 ÷ +45°C	Standard: -20 ÷ +60°C /BT option: -40 ÷ +60°C	Standard: -20 ÷ +60°C /BT option: -40 ÷ +60°C
Applicable standards	EN 60079-0 EN 60079-11		IEC 60079-0 IEC 60079-11	

(1) The type examiner certificates can be downloaded from [www.atos.com](http://www.atos.com)

**⚠ WARNING: service work performed on the valve by the end users or not qualified personnel invalidates the certification**



**12 SIL compliance with IEC 61508: 2010**

- **SC3** (systematic capability)
- max **SIL 2** (HFT = 0 if the hydraulic system does not provide the redundancy for the specific safety function where the component is applied)
- max **SIL 3** (HFT = 1 if the hydraulic system provides the redundancy for the specific safety function where the component is applied)

**13 EX PROOF SOLENOIDS WIRING**

Two diodes in parallel with the winding serve to protect the system from overvoltages during the solenoid switch-off.  
One diode connected in series serves as protection against reverse polarity supply.

Connector wiring	
/6	Connections
1	Coil +
2	Coil -
3	GND

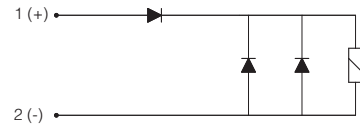

**14 INTRINSICALLY SAFE BARRIERS** - see tech. table **GX010**

Intrinsically safe valves must be powered through safety barriers certified according to Ex-i protection mode, limiting the energy to the solenoid.

To select the proper intrinsically safe barriers following data must be considered:

- 1)  $V_{max}$  and  $I_{max}$  of the solenoid as specified in section **11** must not be exceeded also in fault conditions;
- 2) The current supplied by the barrier, in normal operation condition, must be over the minimum limit (90 mA for coil resistance 108Ω and 70mA for coil resistance 150Ω) to ensure the valve correct operation.

The barriers type **Y-BXNE 412** are galvanically isolated electronic devices, complying with European Norms EN60079-0/06, EN60079-11/07 and ATEX certified according to protection mode Ex ia IIC.

These barriers ensure the optimized functioning of the Atos valves up to the max operating limits specified in section **4**.

The barriers Y-BXNE-412 are double channel type, suitable to operate valves with double or single solenoid. Two single solenoid valves can be connected to the barrier (one to each channel) but they cannot be contemporary operated.

**MODEL CODE OF I.S. BARRIER**

**Y-BXNE 412 00**

\*

Supply voltage  
**E** = 110/230 VAC  
**2** = 24÷48 VDC

**15** INSTALLATION DIMENSIONS [mm]

**ISO 4401: 2005** (see table P005)

**Mounting surface: 4401-03-02-0-05**


Fastening bolts: 4 socket head screws:

M5x30 class 12.9

Tightening torque = 8 Nm

Seals: 4 OR 108



Ports P,A,B,T:  $\varnothing = 7.5$  mm (max)





- P** = PRESSURE PORT
- A, B** = USE PORT
- T** = TANK PORT

Mass [kg]	
DHWL8-06	2,4
DHWL8-06*/A	2,4
DHWL8-07*	4



**DHWL8-06**

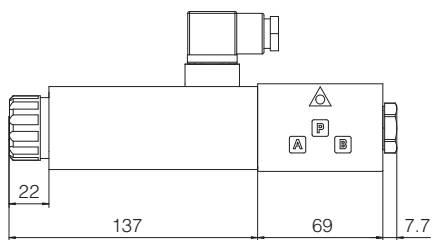


**DHWL8-06\*/A**

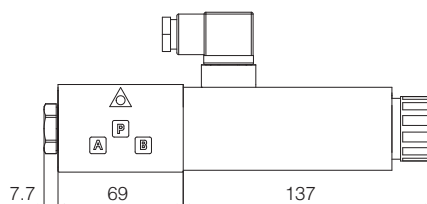

**DHWL8-07\***

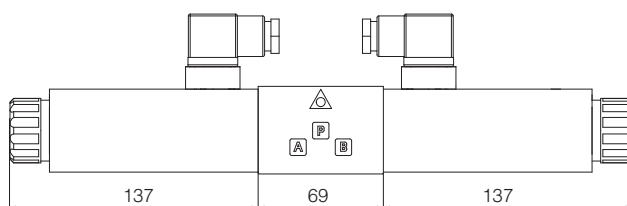

**Option /WP**

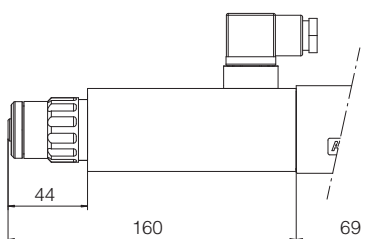

**Note:** the connector is supplied with the valve

**15** RELATED DOCUMENTATION

- X010** Basics for electrohydraulics in hazardous environments
- X050** Summary of Atos intrinsically safe components certified to ATEX, IECEx, EAC
- EX950** Operating and maintenance information for intrinsically safe valves
- P005** Mounting surfaces for electrohydraulic valves